

Codice F5940/1

MISCELATORE TERMOSTATICO DOCCIA ESTERNO SWITCH

- un comando uscita doccetta
- un comando uscita soffione
- base in vetro satinato
- nella versione nero opaco la base è in vetro satinato nero e nelle altre versioni è vetro satinato bianco
- doccia F5928 con supporto
- flessibile chromalux 1500 mm
- maniglia miscelatrice termostatica
- maniglia di regolazione del flusso
- 2 aperture/chiusure del flusso a pressione
- **corpo incasso da ordinare separatamente**

Finiture

-  CROMO
CR
-  HL
-  HS
-  ZL
-  ZS
-  NICKEL SPAZZOLATO
SN
-  BIANCO OPACO
BS
-  NERO OPACO
NS

IMMAGINE




PRODOTTI DA ORDINARE SEPARATAMENTE

[Corpo da incasso](#)



Vedere le condizioni generali di vendita presenti sul nostro

fima | CARLO FRATTINI*

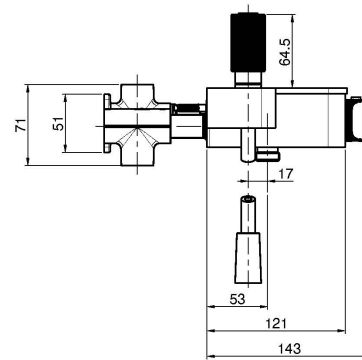[illegible]

Technical drawing of the F2303 bracket, showing front, side, and detail views with dimensions in millimeters.

Front View Dimensions:

- Overall width: 181
- Distance between mounting holes: 150
- Mounting hole diameter: $\varnothing 25$
- Distance from mounting hole to center of bracket: 51
- Distance between center of bracket and side hole: 79.5
- Distance from center of bracket to side hole: 70.5
- Distance from side hole to edge: 99
- Overall height: 122.5
- Radius: R16

Side View Dimensions:


- Height of mounting plate: 60 MIN, 90 MAX

Detail View Dimensions:

- Overall height of detail: 80
- Distance from top to hole: 36
- Hole diameter: $\varnothing 25$
- Distance from hole to bottom: 25
- Bottom hole diameter: $\varnothing 36$

Text:

Art. F2303 obbligatorio da ordinare separatamente

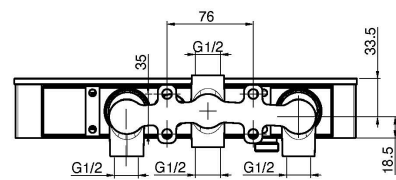

not arising as one property of Γ then Γ cannot be a Γ -factor, only composite of prime representations, or any transmutation to word purely without Γ then Γ cannot be a Γ -factorizations in Γ -factors.